ofing











ERVICE



























ROOFING

Roofing



Technical specifications


Roof for

ROOFING

Outside diameter "W"
Number of poles
Height of the lowest bar
Material of the bar
Roofsheets
Hoofbeat roof
Lunge roof
Fasteners
Construction drawing
Conservation

Prefab concrete or screwfoundation Coating of the poles in any RAL color Impregnating of the bars Windnetting Sliding door Fencing Rain gutter 12 till 22 metres horse exerciser
12 till 22 metres lunging arena
12 till 22 metres combi horse exerciser
13 till 23 metres
9 till 17 pieces, galvanised
approximately 2,5 metres
wood or galvanised steel
onduline or metal roofsheets
4 metres
complete closed
including
including
fully galvanised
according to NEN-EN-ISO-1461-99

option option option option option option option

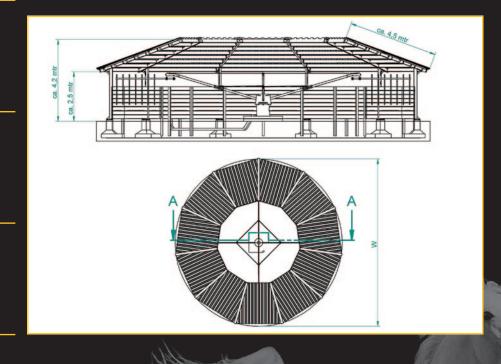



P.O. Box 45

NL-7650 AA

Tubbergen

The Netherlands

Newtonstraat 3 B

NL-7651 AP

Tubbergen

The Netherlands

T. +31 546 - 577305

F. +31 546 - 570300

E-mail info@kylix.nl www.kylix.nl

