


SIGMA FREE WALK HORSE EXERCISER



The **SIGMA** Free walk horse exerciser is KYLIX' self-assembling basic model and requires only a small investment. The **SIGMA** Free walk horse exerciser is an accurate finished walker, with which you and your horses will have years of work out pleasure.



True out its special designed gear system, the **SIGMA** is almost maintenance free so you can relax in the knowledge that your horses are safely exercising in the horse exerciser.

- Direct drive
- Minimum maintenance needed
- Industrial Gear unit
- Including a walk control box
- Economical (about 0.6 kW per hour)
- Interactive section selection
- Easy to operate
- Tension 230V 50/60Hz

INNOVATION - QUALITY - SERVICE

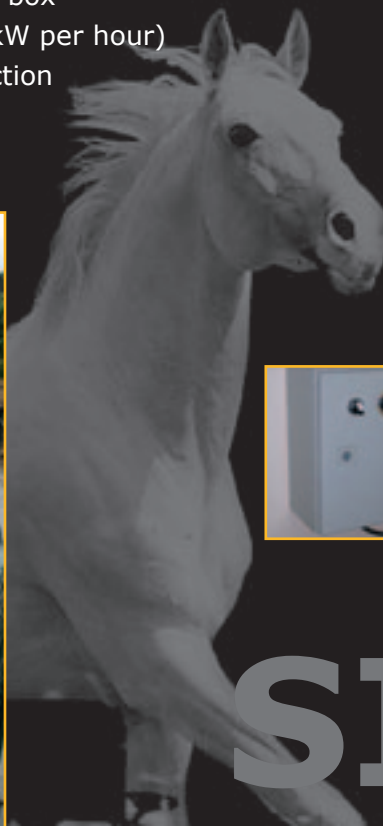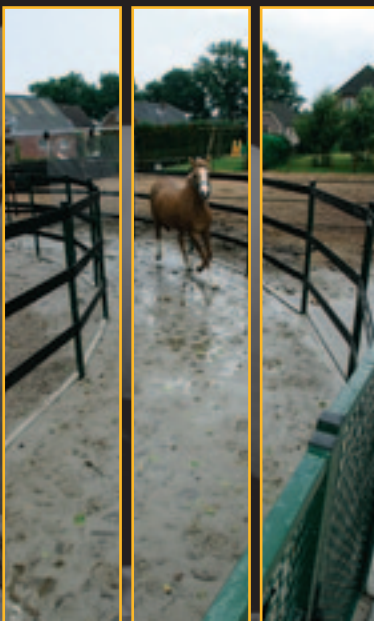

SIGMA

SIGMA

SIGMA FREE WALK HORSE EXERCISER

During the development of this horse exerciser we took care of the customers wish, which is to set up the walker very easily, make it sturdy and reliable and make it a small investment so it is accessible for everyone.

Technical specifications:

Outside diameter of the Sigma	12-16 meter / 39-52,5ft
Number of horses max.	3 / 4 / 5 / 6 horses
Drive	Direct, non slip drive
Power supply	230 Volt AC – 50/60 Hz.; electric mains
Energy consumption	About 0,6 kWh
Conservation	Fully galvanized according NEN-EN-ISO 1461-99
Fasteners	According DIN / ISO norm, Minimum 8.8, Electrolytic galvanized
Tension Cables	Fully galvanized with steel tread inside
Drift fences	Fully galvanized mesh 1.9"*1.9"*3 mm, 50*50*3 mm (2*1,5 m mesh)
Width drift fence	2,0 meter / 6.56 ft
Height drift fence	2,0 meter / 6.56 ft
Run path / hoof path width	2,5 meter / 8.2 ft
Walk control box	Left- and right turn
Time	0-999 minutes per direction
Speed (walk)	0-12 km/h 0-7.5 mph
Section selection	interactive
Housing of Control box	Steel coated for industrial application IP54
In conformity with	CE norm

We recommend installing a separate 230V 50Hz 16-Ampere power-line Cabling and joining to your house installation are excluded of our delivery.

The electrical system and gear unit of the KYLIX free walk exerciser, can be customized for the electrical system in your region.

Including

- Walk control box
- 12 meter / 39.3ft motor cable
- 3 dimensional building plan for self assembly of the horse walker
- Instruction manual for operating of the horse walker

Optional:

- Electrical fence preparation unit for usage of your own device
- Protection hose around the drifting fence
- Programmable walk-trot control box
- Drifting fence with aluminium poles

The SIGMA will be delivered as a pre assembled package and is quick and simple to assemble Measurements of assembly package: length 3-meter / 9.84ft, width 1-meter / 3.28ft, height 1,5-meter / 4.92ft

